

Orientalmotor

Become a robot master in just 3 steps.

Robot Controller **MRC01**

List price: \$2530.00




The MRC01 robot controller supports easy programming and control of in-house designed custom-built robots with 3 simple steps: "Initial Setup", "Operation Programming" and "Operational Checking".

Use the **αSTEP AZ** Series family of products to support your in-house design for improved performance and ease of use.



■ Easily Introduce Custom-built Robots to Existing Systems

The connection between the **MRC01** and host system is controlled directly via EtherNet/IP™.

Custom-built robots can be added easily, without the need to make major changes to the control system from the existing equipment.

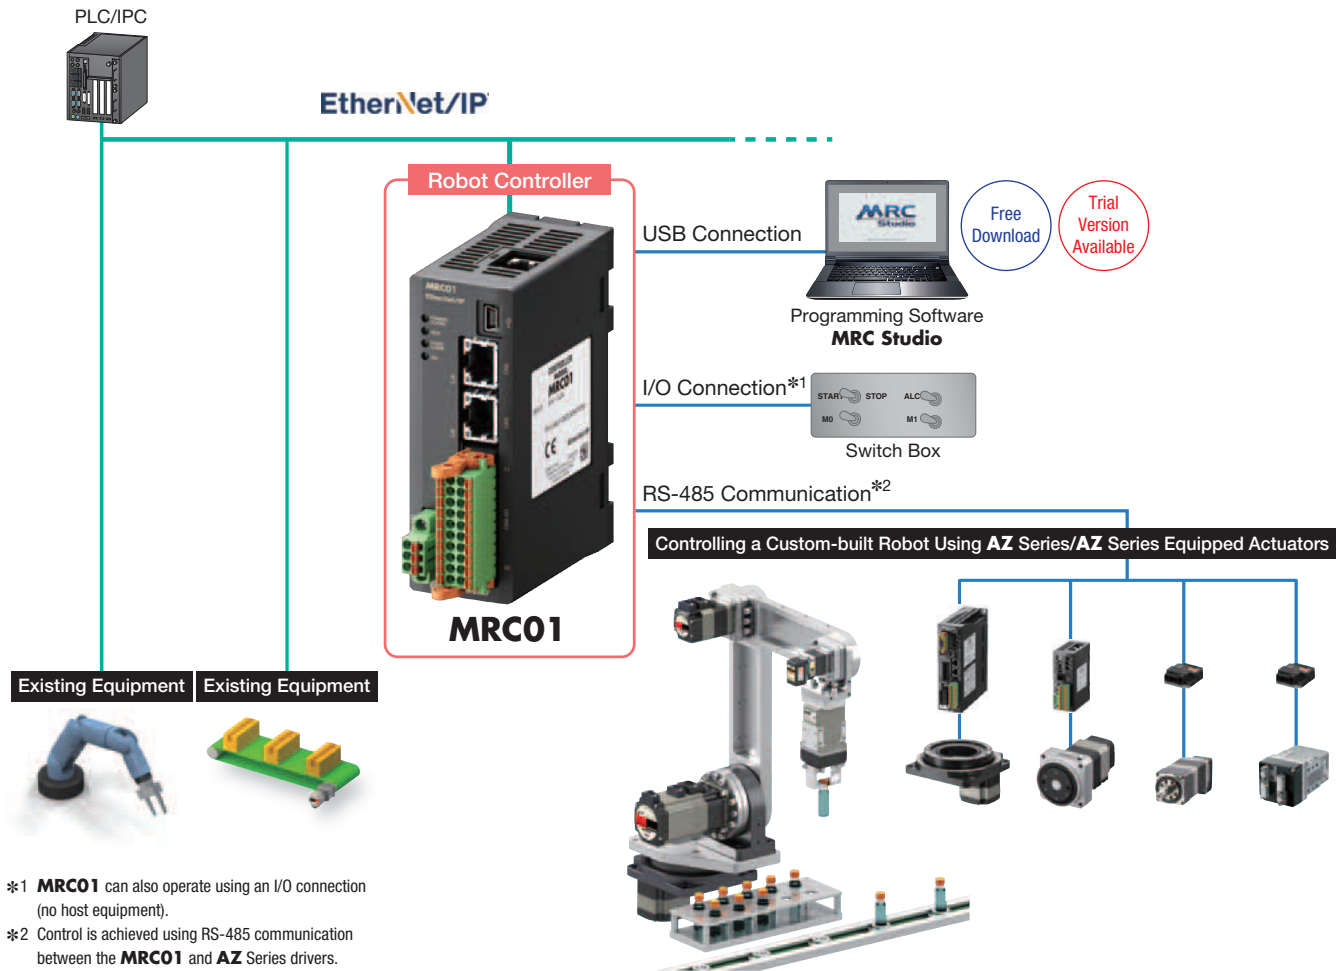


Vertically Articulated Robot Load Mass 1 kg (2.2 lb) Standard Cycle Time for Reciprocating Motion (Reference value)



Easy Setup Even for Beginners

The “Programming Software **MRC Studio**” has been prepared to simplify setting up custom-built robots from the initial setting step to the operation programming step. A trial version of the programming software is also available to allow customers the chance to experience the operation of the **MRC01** before purchase.

*The **MRC Studio** software and EDS files can be downloaded from the Oriental Motor website.

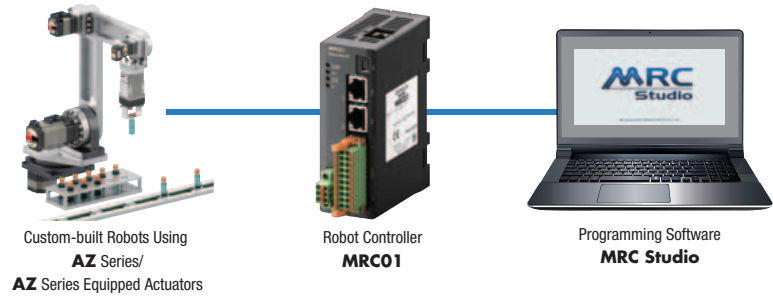


Step1. Easy Setup with Step by Step Guidance


Initial settings are made using a wizard to select the robot type and input mechanism information.

By following the guidance instructions while looking at the illustrations, even absolute beginners can quickly set up a robot's initial settings.


● Follow the Steps to Set Up

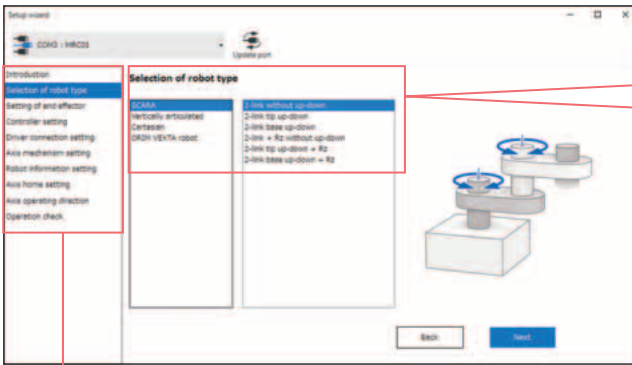


● Input Dimensions (Arm length, etc.) With the Help of the Illustration

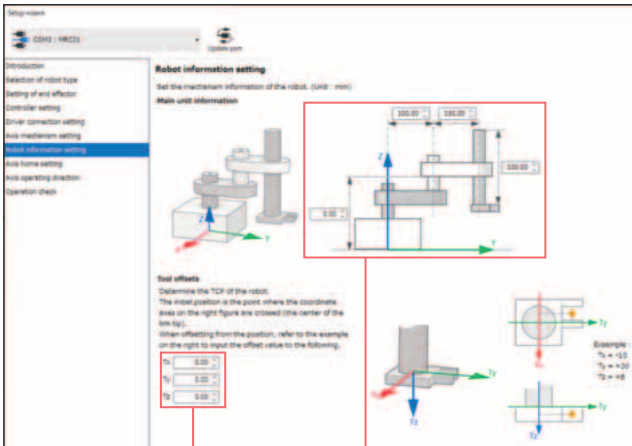


● Select the Robot Type

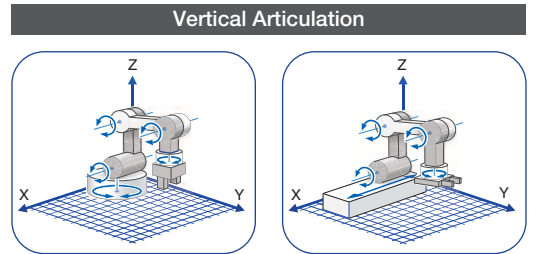

- 3 link base axis swivels + Rz axis
- 3 link linear motion of base axis + Rz axis
- Other: 3 link no base axis; 3 link base axis swivels; 3 link linear motion of base axis

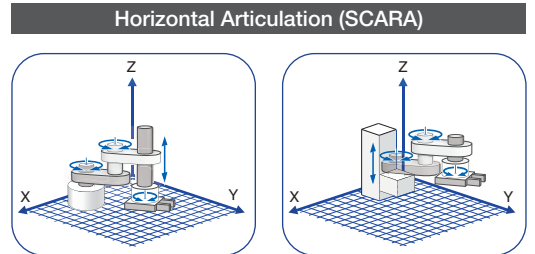

- 2 link elevating end axis + Rz axis
- 2 link elevating base axis + Rz axis
- Other: 2 link no elevating axis; 2 link elevating end axis; 2 link elevating base axis; 2 link no elevating axis + Rz axis

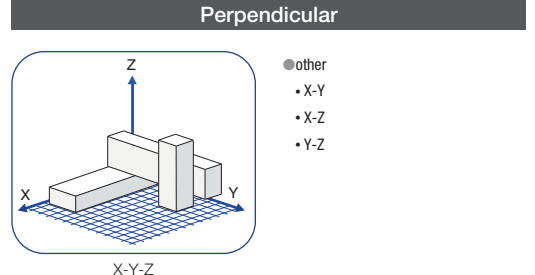


- other
 - X-Y
 - X-Z
 - Y-Z
- Refer to the operating manual for details on supported robots. Operating manuals can be downloaded from the Oriental Motor website.

Video is available on the Oriental Motor website

Available on the Oriental Motor website

→An easy-to-understand explanation of the products

→An overview of the trial version

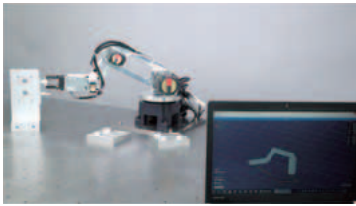

Step2. Say Goodbye to Ladder Logic! Select Items to Program Operation.

Program creation uses a simple command selection format. Programs can be created intuitively, without requiring specialized knowledge such as ladder diagrams. The system supports P to P operation, linear interpolation operation, circular interpolation operation, arch motion and others.

Operating data is executed directly from a host controller via EtherNet/IP.

● Drag and Drop the Required Commands

● Target Position and Speed Setting

Select the necessary action from the "Command" column, drag and drop into the "Sequence" column, then the "Command Setting" column is displayed.

Command	Sequence	Command setting
Move		
PTP		
Linear		
Circular CW		
Circular CCW		
Circular via-point		
Arch		
Axis moving		
End effector		
Return-to-origin		
Pallet PTP		
Pallet linear		

Command	Name	Position [mm]
0	Return-to-origin	X
1	Loop (end)	
2	End effector	Grip object
3	Arch	Move -200.000
4	End effector	Release object
5	Arch	Move to next 0.000
6	Loop (end)	

Arch


Target position

Absolute		Relative	
<input checked="" type="checkbox"/> X	-200.000 mm	<input checked="" type="checkbox"/> Rx	0.000 deg
<input checked="" type="checkbox"/> Y	60.000 mm	<input checked="" type="checkbox"/> Ry	0.000 deg
<input checked="" type="checkbox"/> Z	0.000 mm	<input checked="" type="checkbox"/> Rz	0.000 deg
<input checked="" type="checkbox"/> E	0.000 mm deg	<input type="checkbox"/> Reflect present position	


Arch

A: Ascending height	30.000 mm
B: Maximum height	40.000 mm
C: Descending start height	30.000 mm


Speed




P to P Control




Linear Interpolation



Circular Interpolation (Helical interpolation)



Arch Motion




Palletizing

Step3. Check Operation with an Online 3D Simulator.

The robot's operation program can be checked using a 3D simulator.

The program can be checked easily before the actual robot is activated.

*Cannot be used offline.

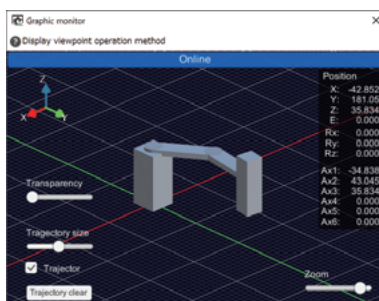


■ Applicable Products

This controller can connect to the following **AZ** Series drivers. It can also be connected to an **AZ** Series-equipped Linear & Rotary Actuators.

AZ Series Drivers

● Built-in Controller Type



Single-Phase 100-120 VAC, 24/48 VDC
Single-Phase/Three-Phase
200-240 VAC

● mini Driver RS-485 Communication Type



24/48 VDC

AZ Series Motors, **AZ** Series-Equipped Linear & Rotary Actuators



Motors



Hollow Rotary Actuators
DGI Series



Compact Linear Actuators
DR Series
DRS2 Series



Electric Linear Slides
EZS Series



Electric Cylinders
EAC Series



Lack and Pinion Systems
L Series



Electric Gripper
EH Series

Product Line

Product Name	List Price
MRC01	\$2530.00

Included

- CN1 Connector (1 pc.)
- CN4 Connector (1 pc.)

Specifications

Basic Specifications



Power Supply	Input Voltage	24 VDC \pm 10%
	Input Current	0.2 A
Interface	Field Network	EtherNet/IP
	Control Input	8 points, Photocoupler
	Control Output	8 points, Photocoupler and Open-Collector
RS-485 Communication Specification		Modbus RTU EIA-485 compliance, Straight cable Shielded twisted-pair wire (TIA/EIA-568B CAT5e or greater recommended) is used up to a total extension length of 50 m (164 ft.).*1
USB Connector	Specifications	USB 2.0 (Full-Speed)
	Cable	Length: 3 m (9.8 ft.) max. Type: A to mini B
Setting Tool		Programming Software MRC Studio
Number of Control Axes		7 axes max.*2
Robot Model		SCARA (2 or 3 links), Vertical Articulated (3 links), Palletizer (1 or 2 parallel-linkages), Cartesian (2 or 3 axes)
Drive Command		P to P, Linear Interpolation, Circular Interpolation, Arc Interpolation, Palette (P to P, Line, Arc)
Monitor		Robot Graphic, Alarm, Information, etc.

*1 If noise generated by the motor cable or power supply cable causes a problem due to wiring and installation, try shielding the cables or insert ferrite cores.

*2 - Only one robot can be controlled by **MRC01**.

- The number of control axes depends on the robot model. For example, if the robot model is horizontal multi-joint (2-links, up and down of tip axis) and also controls the end effector (1 axis), the number of control axes will be 4 axes.

EtherNet/IP Specifications

Protocol		EtherNet/IP (CT17 compliance)
Vendor ID		187: Oriental Motor Company
Device Type		43: Generic Device
Transmission Rate		10/100 Mbps (Auto-negotiation)
Communication Mode		Full-duplex/Half-duplex (Auto-negotiation)
Cable Specifications		Shielded Twisted-pair (STP) Cable Straight/Cross, Category 5e or greater is recommended [Total extension length: 50 m (164 ft.) max.]
Occupied Byte	Output (Scanner \rightarrow MRC01)	2 to 228 bites
	Input (MRC01 \rightarrow Scanner)	2 to 228 bites
Implicit Communication	Number of Supported Connections	2
	Connection Type	Exclusive Owner, Input Only
	Communication Cycle	10 to 3,200 ms
	Connection Type (Scanner \rightarrow MRC01)	Point-to-Point
	Connection Type (MRC01 \rightarrow Scanner)	Point-to-Point, Multicast
	Data Reflection Trigger	Cyclic
IP Address Setting Method		Parameter, DHCP
Supported Topology		Star, Linear, Ring (Device Level Ring)

General Specifications


Degree of Protection	IP10
Operating Environment	Ambient Temperature: 0 to +55°C (+32 to +131°F) (Non-freezing)
	Humidity: 85% or less (Non-condensing)
	Altitude: Max. of 1000 m (3300 ft.) above sea level
	Atmosphere: No corrosive gases or dust. The product should not be exposed to water or oil.
Storage Conditions Transportation Conditions	Ambient Temperature: -25 to +70°C (-13 to +158°F) (Non-freezing)
	Humidity: 85% or less (Non-condensing)
	Altitude: Max. of 3000 m (10000 ft.) above sea level
	Atmosphere: No corrosive gases or dust. The product should not be exposed to water or oil.
Insulation Resistance	The measured value is 100 M Ω or more when a 500 VDC megger is applied between the following locations: - FG Terminal – Power Supply Terminal

Note

- When measuring insulation resistance or performing dielectric voltage withstanding test, disconnect the controller and the motor/actuator.

Standard Cycle Time (Reference Value)

The standard cycle time (reference value) is the time required for reciprocating operation of 25 mm (0.98 in.) vertically and 300 mm (11.8 in.) horizontally with a load mass of 1 kg (2.2 lb.).

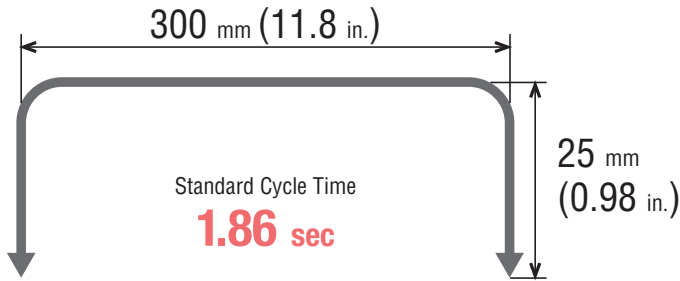



Note

The standard cycle time (reference value) is the data obtained by our in-house robot measured under the operating conditions where the torque of each axis is sufficient for the load mass. Cycle time depends on your operating conditions.



Positioning Distance – Positioning Time (Reference Value)

The positioning time (reference) can be checked from the positioning distance. The positioning time depends on the load mass.

Horizontal Multi-Joint Robot (2-links, elevating base axis)

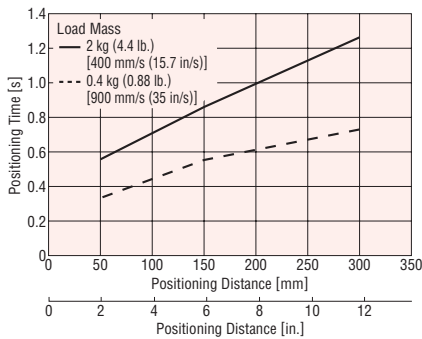


Vertical Multi-Joint Robot (3-links, turning base axis)

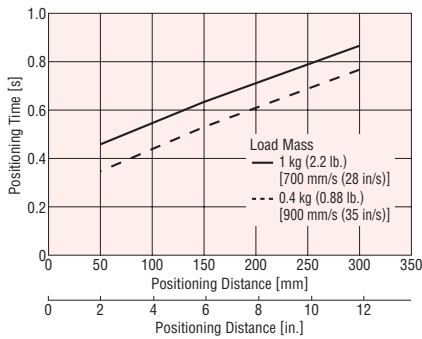

Dimensions Unit: mm (in.) 2D & 3D CAD

Product Name	Mass kg (lb.)	2D CAD
MRC01	0.12 (0.26)	B1537

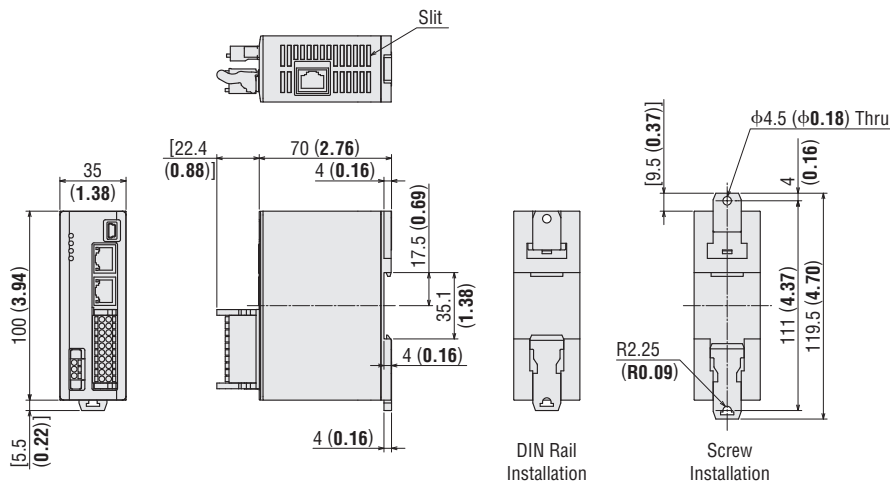

- Included
- Power Supply Connector (CN1)
Connector: FMC1,5/3-STF3,5
(Phoenix Contact)
- I/O Signal Connector (CN4)
Connector: DFMC1,5/10-ST-3,5-LR
(Phoenix Contact)

Cables

■ RS-485 Communication Cables

These cables are used to connect **MRC01** and **AZ** Series driver.


● Product Line

Product Name	Length L [m (ft.)]	Applicable Driver	List Price
CC001-RS4	0.1 (0.33)	Built-in Controller Type DC Input Driver	\$32.00
CC002-RS4	0.25 (0.83)	Built-in Controller Type AC Input Driver Built-in Controller Type DC Input Driver	\$38.00
CC02FLT6	2 (6.6)	Compact Driver RS-485 Communication Type	\$56.00
CC05FLT6	5 (16.4)		\$82.00




● Dimensions Unit: mm (in.)

CC001-RS4, CC002-RS4

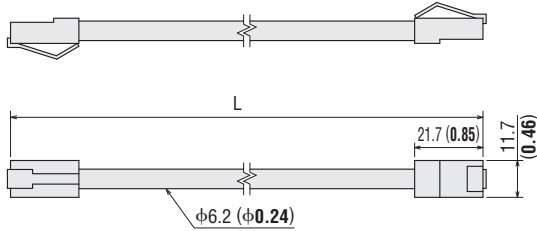

CC02FLT6, CC05FLT6

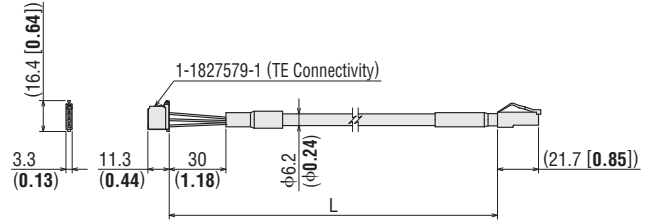

■ I/O Signal Cables General-Purpose Type


- Shielded cables
- Loose wires at both ends
- Easy shield grounding with round ground wire terminals
- The number of lead wire cores can be selected to match the functions being used



● Product Line

Product Name	Length L [m (ft.)]	Number of Lead Wire Cores	Outer Diameter D [mm (in.)]	AWG	List Price		
CC06D005B-1	0.5 (1.64)	6	φ5.4 (φ0.21)	24	\$18.00		
CC06D010B-1	1 (3.3)				\$20.00		
CC06D015B-1	1.5 (4.9)				\$23.00		
CC06D020B-1	2 (6.6)				\$24.00		
CC10D005B-1	0.5 (1.64)				10	φ6.7 (φ0.26)	\$20.00
CC10D010B-1	1 (3.3)						\$22.00
CC10D015B-1	1.5 (4.9)	\$25.00					
CC10D020B-1	2 (6.6)	\$29.00					
CC12D005B-1	0.5 (1.64)	12	φ7.5 (φ0.30)				\$23.00
CC12D010B-1	1 (3.3)						\$25.00
CC12D015B-1	1.5 (4.9)				\$29.00		
CC12D020B-1	2 (6.6)				\$33.00		
CC16D005B-1	0.5 (1.64)				16	φ7.5 (φ0.30)	\$24.00
CC16D010B-1	1 (3.3)						\$28.00
CC16D015B-1	1.5 (4.9)	\$30.00					
CC16D020B-1	2 (6.6)	\$33.00					

● Dimensions Unit: mm (in.)

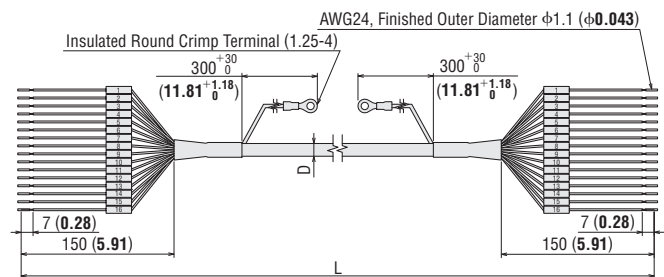

● The figure depicts 16 core wires.

■ DC Power Supply Cables


These cables are used to connect **MRC01** and the DC power supply.

● Product Line

Product Name	Length L [m (ft.)]	List Price
CC02D005-3	0.5 (1.64)	\$16.00
CC02D010-3	1 (3.3)	\$18.00
CC02D015-3	1.5 (4.9)	\$20.00
CC02D020-3	2 (6.6)	\$22.00
CC02D050-3	5 (16.4)	\$25.00



● Dimensions Unit: mm (in.)

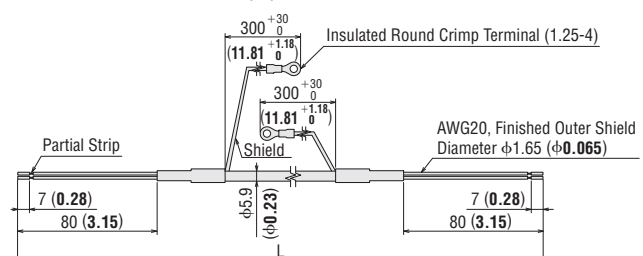

Specifications are subject to change without notice. This catalog was published in December, 2022.

ORIENTAL MOTOR U.S.A. CORP.

Western Sales and Customer Service Center

Tel: (310) 715-3301 Fax: (310) 225-2594

Los Angeles

Tel: (310) 715-3301

San Jose

Tel: (408) 392-9735

Midwest Sales and Customer Service Center

Tel: (847) 871-5900 Fax: (847) 472-2623

Chicago

Tel: (847) 871-5900

Dallas

Tel: (214) 432-3386

Toronto

Tel: (905) 502-5333

Eastern Sales and Customer Service Center

Tel: (781) 848-2426 Fax: (781) 848-2617

Boston

Tel: (781) 848-2426

New York

Tel: (973) 359-1100

Technical Support

Tel: (800) 468-3982 / 8:30 A.M. to 5:00 P.M., P.S.T. (M-F)
7:30 A.M. to 5:00 P.M., C.S.T. (M-F)

E-mail: techsupport@orientalmotor.com

**Obtain Specifications, Online Training
and Purchase Products at:**
www.orientalmotor.com